



Engineered  
in Italy

**NEW**  
**5 BUSBAR**

## FU 260 / 265 / 270 / 275 / 280 P

Polycrystalline Photovoltaic Module - 60 Cells



### GENERAL FEATURES

- **15-year product warranty**
- **High-efficiency cells** decrease ohmic losses and increase the yield
- **Tempered 3.2 mm safety glass** for optimal mechanical stability and transparency
- **High temperature resistance** (tested at 105° C for 200 hours)
- For installations **up to an altitude of 7000 m**
- Maximum **resistance against hail** (83 km/h)
- Quality control with **electroluminescence (EL) tests** on each module

### CERTIFICATIONS

- › **IEC 61215:2016 - IEC 61730:2016 & Factory Inspection**
- › **Fire Resistance - Class 1**
- › **Salt Corrosion Resistance**  
IEC 61701
- › **Ammonia Corrosion**  
IEC 62716
- › **PID Test - Class A**  
Potential Induced Degradation
- › **Dust and Sand Resistance**  
IEC 60068-2-68

**NEW**

### GUARANTEES

#### Performance guarantee

Max power decrease **0.5%/year**

97% at the end of first year



**90% at the end of 20<sup>th</sup> year**

87% at the end of **25<sup>th</sup> year**

#### Product guarantee

**15 YEARS**

■ Market standard performances  
■ FuturaSun performances

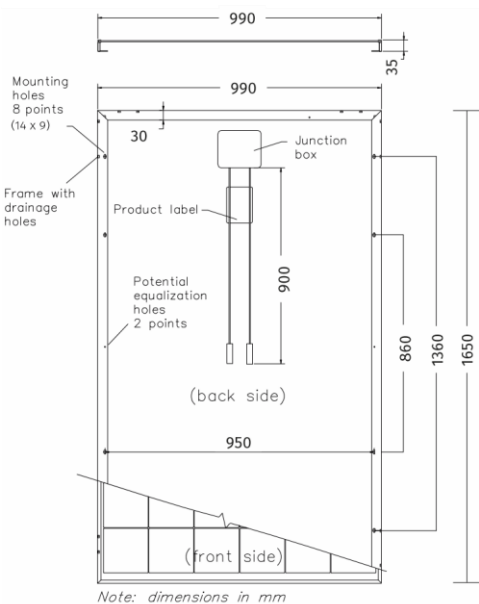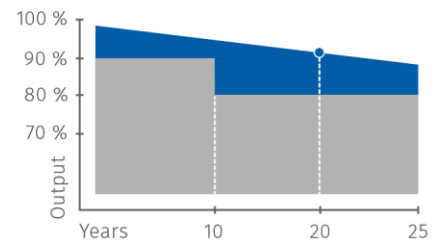

## ELECTRICAL DATA

MODULE		FU 260 P	FU 265 P	FU 270 P	FU 275 P	FU 280 P*
<i>Standard Test Conditions STC: 1000 W/sqm - AM 1.5 - 25 °C - tolerance: Pmax (±3%), Voc (±4%), Isc (±5%)</i>						
Module power (Pmax)	W	260	265	270	275	280
Open circuit voltage (Voc)	V	37.59	37.95	38.3	38.65	39
Short circuit current (Isc)	A	8.86	8.95	9.03	9.11	9.21
Maximum power voltage (Vmpp)	V	30.65	30.95	31.22	31.52	31.8
Maximum power current (Impp)	A	8.49	8.57	8.65	8.73	8.85
Module efficiency	%	15.92	16.22	16.53	16.84	17.14
<i>Nominal Module Operating Temperature NMOT: 800 W/mq - T=45 °C - A M 1.5</i>						
Module power (Pmax)	W	191	195	198	202	205
Open circuit voltage (Voc)	V	34.39	34.72	35.04	35.36	35.81
Short circuit current (Isc)	A	7.26	7.33	7.40	7.46	7.57
Maximum power voltage (Vmpp)	V	27.92	28.20	28.44	28.71	28.8
Maximum power current (Impp)	A	6.86	6.92	6.99	7.05	7.15

\* Certification on going

## TEMPERATURE RATINGS

Temperature coefficient Isc	%/°C	0.0474
Temperature coefficient Voc	%/°C	-0.285
Temperature coefficient Pmax	%/°C	-0.37
NMOT *	°C	45
Operating temperature	°C	from -40 to +85

\* Nominal Operating Cell Temperature

## MECHANICAL SPECIFICATIONS

Dimensions	1.650x 990 x 35 mm
Weight	17.7 kg
Glass	Tempered, transparent, 3.2 mm
Cell encapsulation	EVA (Ethylene Vinyl Acetate)
Cells	polycrystalline cells 156.75x156.75 mm
Backsheet	Composite multilayer film
Frame	Anodized aluminium frame with mounting and drainage holes
Junction box	Certified according to IEC 62790, IP 68 approved
Cables	Solar cable, length 900 mm assembled with MC4-combinable plugs
Maximum reverse current (Ir)	A
Maximum system voltage	V (1500 V on request)
Maximum load (wind/snow)	Pa (including safety factor 1.5)
Protection Class	- accordance to IEC 61730

## Solar aus Südbayern

D-83043 Bad Aibling • Farrenpolnstraße 11

Tel. +49 (0) 8061 - 93 99 850

USt-IdNr DE 252011780

p\_260-280\_en



**FuturaSun srl**

Pasubio, 14 - 35013 Cittadella - Italy

Tel + 39 049 5979802 Fax + 39 049 0963081

www.futurasun.com - info@futurasun.it